



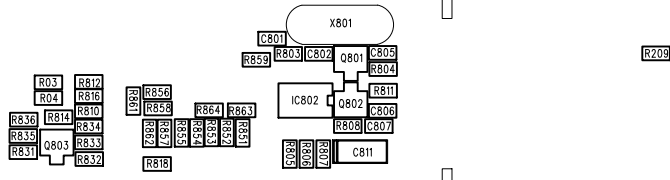

TCB-880 FRONT PCB  
Rev 02



## TCB881

NO	LEVEL	PART NUMBER	DESCRIPTION	QTY	LOCATION NO.
1	[ASS'Y]	5A0-8802-000	VOL. PCB ASS'Y - TCB881	1.00	
2	[PART]	100-103J-S00	FILM RES. 10KOHM 0.125W +-5 ST	1.00	R400
3	[PART]	425-0680-000	COIL AXIAL 6.8UH AL0305 MATSUTA	4.00	L501 L502 L504 L506
4	[PART]	500-8800-400	PCB CHANNEL 1LAYER LUCKY	1.00	
5	[PART]	500-8802-000	PCB VOLUME 1LAYER Ver2.0A 1LAYER LUCYVIEW	1.00	
6	[PART]	540-0303-000	WIRE HARNESS PH-3PINx2 UL1007 #26 L=30MM FINE	1.00	J103--J104
7	[PART]	540-0318-000	WAFER 3PIN PH-3A 180C FINE	2.00	J103 J104
8	[PART]	540-0607-000	WIRE HARNESS PH-6PIN TO OPEN UL1007 NO.26 L=70mm	1.00	J502
9	[PART]	540-1607-000	WIRE HARNESS PH-16PINx2 UL2468 #26 L=70MM FINE	1.00	J101 J102
10	[PART]	540-1618-000	WAFER 16PIN PH-16A 180C FINE	1.00	J101
11	[PART]	541-0166-002	CONNECTOR SOCKET FD-MIC6PIN-F NINGBO	1.00	J501
12	[PART]	547-0415-000	HEAT SHRINK TUBE DIA4.0MM X 15MM	6.00	
13	[PART]	560-1010-000	SW ROTARY PS1210-KQ20A10-A20-102 CTR	1.00	SW811
14	[PART]	570-1000-001	ROTARY VR R1610NS-KQ25-A10K-G74	1.00	VR101
15	[PART]	570-1001-000	VR R1610NS-KA20D11.5-B103-000-G74 CTR	1.00	VR102
16	[PART]	570-5030-001	ROTARY VR R1610N-K20-B50K	2.00	VR103 VR401
17	[ASS'Y]	5A0-8802-100	LCD PCB ASS'Y - TCB881	1.00	
18	[PART]	142-102J-000	CHIP RES. 0603 1KOHM +-5 PHILIPS	2.00	R810 R818
19	[PART]	142-103J-000	CHIP RES. 0603 10KOHM +-5 PHILIPS	5.00	R805 R806 R807 R811 R814
20	[PART]	142-104J-000	CHIP RES. 0603 100KOHM +-5 PHILIPS	1.00	R804
21	[PART]	142-105J-000	CHIP RES. 0603 1MOHM +-5 PHILIPS	1.00	R803
22	[PART]	142-222J-000	CHIP RES. 0603 2.2KOHM +-5 PHILIPS	7.00	R04 R209 R832 R833 R834 R835 R836
23	[PART]	142-224J-000	CHIP RES. 0603 220KOHM +-5 PHILIPS	1.00	R808
24	[PART]	142-473J-000	CHIP RES. 0603 47KOHM +-5 PHILIPS	16.00	R812 R816 R831 R851 R852 R853 R854 R855 R856 R857 R858 R859 R861 R862 R863 R864
25	[PART]	212-103B-3K0	CHIP CERAMIC CAP. 0603 0.01UF X7R 16V +-10	2.00	C806 C807
26	[PART]	212-105F-3Z0	CHIP CERAMIC CAP. 0603 1UF Y5V 16V -20+80 PHILIPS	1.00	C805
27	[PART]	212-680C-6J0	CHIP CERAMIC CAP. 0603 68PF NP0 50V +-5 PHILIPS	2.00	C801 C802
28	[PART]	221-1064-M00	CHIP TANTAL CAP. 10UF 16V A SIZE +-20	1.00	C811
29	[PART]	305-0101-000	CHIP TR KRC101S SOT-23 KEC	1.00	Q802
30	[PART]	305-0104-000	CHIP TR KRC104S SOT-23 KEC	1.00	Q801
31	[PART]	305-9101-000	CHIP TR KRA101S SOT-23 KEC	1.00	Q803
32	[PART]	323-8721-001	IC CPU TMP87CM21CDFG-6GK3 TOSHIBA	1.00	IC801
33	[PART]	338-2402-A00	IC EEPROM FT24C02A FMD	1.00	IC802
34	[PART]	350-0603-000	CHIP LED BLUE AOT-0603P-B01-V BLUEWIZ	14.00	D954 D955 D956 D957 D958 D959 D960 D963 D964 D965 D967 D968 D951 D952
35	[PART]	352-2295-000	LCD SDM8A2295B SANTECH	1.00	LCD801

36	[PART]	363-0400-000	CRYSTAL HC-49 / S 4.0MHZ 20P DTRON	1.00	X801
37	[PART]	500-8800-100	PCB DISPLAY (FRONT) FR-4 (2 LAYER 1.6T) Ver1.1 LUC	1.00	
38	[PART]	500-8800-200	PCB LED FR-4 (2 LAYER 1.0T) LUCKY	1.00	
39	[PART]	561-2202-000	SW SLIDE SKS-22021T SEKWANG	3.00	SW101 SW102 SW201
40	[PART]	564-1109-100	SWITCH TACT KFC-821 GABOU	8.00	SW801 SW802 SW803 SW804 SW805 SW806 SW807 SW808
41	[PART]	701-C8800-80A	REFLECTOR(HOLDER) ACRYL	1.00	For diffuser
42	[PART]	701-C8800-90A	DIFFUSER ACRYL, 45.8X19.3X2.4T	1.00	For diffuser
43	[PART]	702-C8800-30A	LCD HOUSING SPT 0.3T	1.00	For diffuser
44	[PART]	703-C8800-30A	ZEBRA 30X9.2X2.0T CARBON SILICONE	1.00	For diffuser
45	[PART]	718-R000D-037	EVA SPONGE-A 49X2.0X0.8T, BLACK	2.00	for LCD bracket
46	[PART]	718-R000D-038	EVA SPONGE-B 24.5X2.0X0.8T, BLACK	2.00	for LCD bracket
47	[PART]	722-R0000-002	WHITE SHEET	1.00	For diffuser
48	[ASS'Y]	5A0-8802-300	MAIN PCB ASS'Y - TCB881	1.00	
49	[PART]	102-100J-S00	FILM RES. 100OHM 0.5W +-5 ST	1.00	R921
50	[PART]	102-229J-S00	FILM RES. 2.2OHM 0.5W +-5 ST	1.00	R712
51	[PART]	102-471J-S00	FILM RES. 470OHM 0.5W +-5 ST	2.00	R951 R954
52	[PART]	102-472J-S00	FILM RES. 4.7KOHM 0.5W +-5 ST	1.00	R713
53	[PART]	102-561J-S00	FILM RES. 560OHM 0.5W +-5 ST	1.00	R953
54	[PART]	103-102J-S00	FILM RES. 1KOHM 1W +-5 ST	1.00	R952
55	[PART]	112-100J-S00	METAL OXID RESISTOR 100OHM 2W +-5 ST	1.00	R208
56	[PART]	142-000J-000	CHIP RES. 0603 0OHM +-5 PHILIPS	3.00	R180 R187 R201
57	[PART]	142-010J-000	CHIP RES. 0603 1OHM +-5 PHILIPS	2.00	R206 R706
58	[PART]	142-100J-000	CHIP RES. 0603 10OHM +-5 PHILIPS	3.00	R133 R165 R301
59	[PART]	142-101J-000	CHIP RES. 0603 100OHM +-5 PHILIPS	8.00	R104 R109 R134 R168 R314 R401 R821 R932
60	[PART]	142-102J-000	CHIP RES. 0603 1KOHM +-5 PHILIPS	19.00	R164 R182 R183 R185 R200 R222 R234 R238 R308 R312 R321 R410 R501 R571 R572 R955 R956 R957 R958
61	[PART]	142-103J-000	CHIP RES. 0603 10KOHM +-5 PHILIPS	12.00	R102 R123 R157 R162 R211 R315 R412 R413 R414 R703 R823 R914
62	[PART]	142-104J-000	CHIP RES. 0603 100KOHM +-5 PHILIPS	9.00	R140 R141 R159 R186 R188 R202 R233 R309 R311
63	[PART]	142-122J-000	CHIP RES. 0603 1.2KOHM +-5 PHILIPS	1.00	R181
64	[PART]	142-152J-000	CHIP RES. 0603 1.5KOHM +-5 PHILIPS	4.00	R302 R304 R742 R924
65	[PART]	142-153J-000	CHIP RES. 0603 15KOHM +-5 PHILIPS	4.00	R155 R166 R235 R323
66	[PART]	142-154J-000	CHIP RES. 0603 150KOHM +-5 PHILIPS	2.00	R189 R701
67	[PART]	142-183J-000	CHIP RES. 0603 18KOHM +-5 PHILIPS	2.00	R172 R417
68	[PART]	142-221J-000	CHIP RES. 0603 220OHM +-5 PHILIPS	2.00	R169 R702
69	[PART]	142-222J-000	CHIP RES. 0603 2.2KOHM +-5 PHILIPS	15.00	R01 R108 R152 R203 R237 R307 R402 R500 R817 R822 R912 R922 R923 R961 R963
70	[PART]	142-223J-000	CHIP RES. 0603 22KOHM +-5 PHILIPS	3.00	R132 R137 R305
71	[PART]	142-224J-000	CHIP RES. 0603 220KOHM +-5 PHILIPS	2.00	R171 R177
72	[PART]	142-225J-000	CHIP RES. 0603 2.2MOHM +-5 PHILIPS	1.00	R153
73	[PART]	142-229J-000	CHIP RES. 0603 2.2OHM +-5 PHILIPS	2.00	R204 R711

74	[PART]	142-272J-000	CHIP RES. 0603 2.7KOHM +-5 PHILIPS	2.00	R167 R191
75	[PART]	142-273J-000	CHIP RES. 0603 27KOHM +-5 PHILIPS	3.00	R103 R403 R416
76	[PART]	142-333J-000	CHIP RES. 0603 33KOHM +-5 PHILIPS	3.00	R175 R404 R407
77	[PART]	142-335J-000	CHIP RES. 0603 3.3MOHM +-5 PHILIPS	1.00	R135
78	[PART]	142-391J-000	CHIP RES. 0603 390OHM +-5 PHILIPS	1.00	R156
79	[PART]	142-393J-000	CHIP RES. 0603 39KOHM +-5 PHILIPS	1.00	R306
80	[PART]	142-470J-000	CHIP RES. 0603 47OHM +-5 PHILIPS	3.00	R184 R705 R913
81	[PART]	142-471J-000	CHIP RES. 0603 470OHM +-5 PHILIPS	5.00	R101 R105 R106 R236 R931
82	[PART]	142-472J-000	CHIP RES. 0603 4.7KOHM +-5 PHILIPS	9.00	R138 R161 R205 R223 R322 R324 R406 R704 R962
83	[PART]	142-473J-000	CHIP RES. 0603 47KOHM +-5 PHILIPS	11.00	R139 R163 R174 R176 R192 R300 R303 R316 R409 R411 R415
84	[PART]	142-474J-000	CHIP RES. 0603 470KOHM +-5 PHILIPS	2.00	R405 R573
85	[PART]	142-512J-000	CHIP RES. 0603 5.1KOHM +-5 SAMSUNG_PHILIPS	1.00	R915
86	[PART]	142-562J-000	CHIP RES. 0603 5.6KOHM +-5 PHILIPS	1.00	R408
87	[PART]	142-563J-000	CHIP RES. 0603 56KOHM +-5 PHILIPS	1.00	R313
88	[PART]	142-823J-000	CHIP RES. 0603 82KOHM +-5 PHILIPS	1.00	R173
89	[PART]	162-104V-001	TRIM. POTENTIOMETER WS0612-B104-000-G36 CTR	2.00	RV571 RV572
90	[PART]	162-222V-001	TRIM. POTENTIOMETER WS0612-B222-000-G36 CTR	1.00	RV231
91	[PART]	162-223V-001	TRIM. POTENTIOMETER WS0612-B223-000-G36 CTR	1.00	RV401
92	[PART]	162-472V-001	TRIM. POTENTIOMETER WS0612-B472-000-G36 CTR	2.00	RV131 RV911
93	[PART]	172-101J-600	NTC THERMISTOR 100OHM NCP18XF101J03RB MURATA	1.00	TH131
94	[PART]	172-103J-800	NTC THERMISTOR 10KOHM NCP18XH103J03RB MURATA	1.00	TH101
95	[PART]	202-1059-M00	ELECT CAP. 1UF KR1-16V010MA 5x11 DONGXIANG	3.00	C167 C407 C408
96	[PART]	202-1069-M00	ELECT CAP. 10UF KR1-16V100MA 5x11 DONGXIANG	9.00	C208 C232 C331 C332 C333 C913 C921 C931 C964
97	[PART]	202-1079-M00	ELECT CAP. 100UF KR3-16V101MA 5x11 DONGXIANG	3.00	C143 C821 C923
98	[PART]	202-108E-M00	ELECT CAP. 1000UF KR1-16V102MF 10x20 DONGXIANG	4.00	C207 C213 C217 C912
99	[PART]	202-2259-M00	ELECT CAP. 2.2UF KR1-16V2R2MA 5x11 DONGXIANG	1.00	C741
100	[PART]	202-2269-M00	ELECT CAP. 22UF KR1-16V220MA 5x11 DONGXIANG	1.00	C221
101	[PART]	202-2279-M00	ELECT CAP. 220UF KR1-16V221MB 5x11 DONGXIANG	3.00	C210 C953 C954
102	[PART]	202-4759-M00	ELECT CAP. 4.7UF KR1-16V4R7MA 5x11 DONGXIANG	3.00	C411 C960 C963
103	[PART]	202-4769-M00	ELECT CAP. 47UF KR1-16V470MA 5x11 DONGXIANG	3.00	C185 C233 C933
104	[PART]	205-1070-M00	ELECT CAP. 100UF 50V 8X11.5 DONGXIANG	1.00	C904
105	[PART]	212-020C-6C0	CHIP CERAMIC CAP. 0603 2PF NP0 50V +-0.25 PHILIPS	2.00	C119 C730
106	[PART]	212-030C-6C0	CHIP CERAMIC CAP. 0603 3PF NP0 50V +-0.25 PHILIPS	1.00	C319
107	[PART]	212-060C-6C0	CHIP CERAMIC CAP. 0603 6PF NP0 50V +-0.25 PHILIPS	2.00	C317 C321
108	[PART]	212-080C-6C0	CHIP CERAMIC CAP. 0603 8PF NP0 50V +-0.25 PHILIPS	1.00	C326
109	[PART]	212-100C-6J0	CHIP CERAMIC CAP. 0603 10PF NP0 50V +-5 PHILIPS	4.00	R107 C96 C110 C113 C324
110	[PART]	212-101C-6J0	CHIP CERAMIC CAP. 0603 100PF NP0 50V +-5 PHILIPS	12.00	C101 C105 C109 C303 C304 C305 C313 C314 C711 C712 C731 C733
111	[PART]	212-102B-3K0	CHIP CERAMIC CAP.0603 0.001UF X7R 16V +-10	3.00	C230 C239 C404

112	[PART]	212-103B-3K0	CHIP CERAMIC CAP. 0603 0.01UF X7R 16V +-10	39.00	C111 C114 C115 C116 C117 C118 C153 C154 C156 C157 C161 C162 C166 C183 C184 C201 C231 C234 C235 C323 C412 C415 C501 C502 C503 C504 C506 C571 C703 C704 C708 C713 C901 C902 C903 C911 C922 C924 C932
113	[PART]	212-104B-3K0	CHIP CERAMIC CAP.0603 0.1UF X7R 16V +-10 PHILIPS	20.00	C122 C123 C132 C137 C138 C168 C169 C180 C181 C186 C211 C229 C236 C309 C322 C325 C405 C413 C573
114	[PART]	212-105F-3Z0	CHIP CERAMIC CAP. 0603 1UF Y5V 16V -20+80 PHILIPS	8.00	C134 C135 C159 C401 C402 C805 C961 C962
115	[PART]	212-151C-6J0	CHIP CERAMIC CAP. 0603 150PF NP0 50V +-5 PHILIPS	4.00	C102 C104 C106 C311
116	[PART]	212-160C-6J0	CHIP CERAMIC CAP. 0603 16PF NP0 50V +-5 PHILIPS	1.00	C316
117	[PART]	212-180C-6J0	CHIP CERAMIC CAP. 0603 18PF NP0 50V +-5 PHILIPS	1.00	C112
118	[PART]	212-181C-6J0	CHIP CERAMIC CAP. 0603 180PF NP0 50V +-5 PHILIPS	2.00	C701 C734
119	[PART]	212-220C-6J0	CHIP CERAMIC CAP. 0603 22PF NP0 50V +-5 PHILIPS	2.00	C312 C727
120	[PART]	212-221C-6J0	CHIP CERAMIC CAP. 0603 220PF NP0 50V +-5 PHILIPS	4.00	C329 C717 C719 C724
121	[PART]	212-223C-4K0	CHIP CERAMIC CAP. 0603 0.022UF NP0 25V +-10 PHILIP	4.00	C203 C214 C238 C403
122	[PART]	212-223C-6J0	CHIP CERAMIC CAP. 0603 0.022UF NP0 50V +-5 PHILIP	2.00	C158 C172
123	[PART]	212-224B-3K0	CHIP CERAMIC CAP. 0603 0.22UF X7R 16V +-10 PHILIPS	1.00	C140
124	[PART]	212-300C-6J0	CHIP CERAMIC CAP. 0603 30PF NP0 50V +-5 PHILIPS	1.00	C315
125	[PART]	212-330C-6J0	CHIP CERAMIC CAP. 0603 33PF NP0 50V +-5 PHILIPS	3.00	C108 C302 C318
126	[PART]	212-331C-6J0	CHIP CERAMIC CAP. 0603 330PF NP0 50V +-5 PHILIPS	6.00	C714 C715 C723 C725 C726 C729
127	[PART]	212-390C-6J0	CHIP CERAMIC CAP. 0603 39PF NP0 50V +-5 PHILIPS	1.00	C700
128	[PART]	212-470C-6J0	CHIP CERAMIC CAP. 0603 47PF NP0 50V +-5 PHILIPS	6.00	C103 C107 C182 C328 C720 C722
129	[PART]	212-471C-6J0	CHIP CERAMIC CAP. 0603 470PF NP0 50V +-5 PHILIPS	1.00	C718
130	[PART]	212-473C-4K0	CHIP CERAMIC CAP. 0603 0.047UF NP0 25V +-10 PHILIP	8.00	C152 C163 C164 C165 C306 C310 C721 C914
131	[PART]	212-474B-3K0	CHIP CERAMIC CAP. 0603 0.47UF X7R 16V +-10	1.00	C301
132	[PART]	212-474B-6K0	CHIP CERAMIC CAP. 0603 0.47UF X7R 50V +-10	1.00	C212
133	[PART]	212-560C-6J0	CHIP CERAMIC CAP. 0603 56PF NP0 50V +-5 PHILIPS	1.00	C130
134	[PART]	212-680C-6J0	CHIP CERAMIC CAP. 0603 68PF NP0 50V +-5 PHILIPS	4.00	C97 C131 C727 C732
135	[PART]	212-681C-6J0	CHIP CERAMIC CAP. 0603 680PF NP0 50V +-5 PHILIPS	1.00	C414
136	[PART]	212-683B-6K0	CHIP CERAMIC CAP. 0603 0.068UF X7R 16V +-10 PHILIP	1.00	C410
137	[PART]	212-820C-6J0	CHIP CERAMIC CAP. 0603 82PF NP0 50V +-5 PHILIPS	2.00	C406 C707
138	[PART]	22C-101C-J00	DISK CAP. 100PF 25V +-5	1.00	C735
139	[PART]	22D-470C-J00	DISK CAP. 47PF 50V +-5	1.00	C735A
140	[PART]	230-2000-000	DIP TRIMMER CAP. 6DIA 20PF KCVN620 FOKITS	1.00	CT301
141	[PART]	300-1504-000	CHIP TR KTA1504S SOT-23 KEC	4.00	Q164 Q233 Q912 Q924
142	[PART]	300-3875-000	CHIP TR. SWITCHING KTC3875S SOT-23 KEC	9.00	Q151 Q181 Q182 Q183 Q185 Q234 Q742 Q923 Q931
143	[PART]	300-3880-000	CHIP TR KTC3880S SOT-23 KEC	8.00	Q101 Q161 Q162 Q301 Q302 Q303 Q701 Q702
144	[PART]	301-0211-000	CHIP TR 2SK211-Y TOSHIBA	2.00	Q102 Q103
145	[PART]	302-1006-000	TR KTC1006 KEC	1.00	Q703
146	[PART]	302-1241-000	TRANSISTOR KTA1241 KEC	3.00	Q221 Q951 Q952
147	[PART]	302-2078-000	TR 2SC2078E SANYO	1.00	Q704
148	[PART]	302-3205-000	TR. DIP TYPE KTC3205 KEC	1.00	Q921

149	[PART]	305-0101-000	CHIP TR KRC101S SOT-23 KEC	12.00	Q104 Q105 Q153 Q222 Q305 Q311 Q312 Q313 Q401 Q402 Q953 Q954
150	[PART]	305-0102-000	CHIP TR KRC102S SOT-23 KEC	1.00	Q914
151	[PART]	305-0110-000	CHIP TR KRC110S SOT-23 KEC	2.00	Q184 Q961
152	[PART]	305-0111-000	CHIP TR KRC111S SOT-23 KEC	4.00	Q202 Q502 Q962 Q963
153	[PART]	305-0112-000	CHIP TR KRC112S SOT-23 KEC	5.00	Q122, Q152, Q154, Q913, Q922
154	[PART]	305-9102-000	CHIP TR KRA102S SOT-23 KEC	1.00	Q163
155	[PART]	311-1962-000	POWER FET KTA1962 A-O-U / P KEC	1.00	Q911
156	[PART]	331-0358-A00	IC OP AMP KIA358F KEC	1.00	IC102
157	[PART]	331-4558-A00	IC OP AMP KIA4558F KEC	1.00	IC401
158	[PART]	332-2003-000	IC AUDIO AMP TDA2003 ST	1.00	IC201
159	[PART]	335-7152-A00	IC PLL LC7152NM SANYO	1.00	IC301
160	[PART]	336-5019-A00	IC IF SL5019 AUK	1.00	IC101
161	[PART]	340-0051-A00	CHIP DIODE ZENER (ESC) KDZ5.1EV KEC	1.00	DZ181
162	[PART]	340-0056-A00	CHIP DIODE ZENER (ESC) KDZ5.6EV KEC	1.00	DZ931
163	[PART]	340-0082-A00	CHIP DIODE ZENER (ESC) KDZ8.2EV KEC	1.00	DZ921
164	[PART]	341-0251-A00	DIODE VARICAP KDV251S SOT-23 KEC	2.00	D301 D302
165	[PART]	342-0181-A00	CHIP DIODE SWITCHING KDS181 SOT-23 KEC	1.00	D401
166	[PART]	342-0184-A00	CHIP DIODE SWITCHING KDS184 SOT-23 KEC	15.00	D102 D103 D105 D171 D180 D181 D182 D233 D571 D572 D741 D742 D921 D961 D962
167	[PART]	342-0226-A00	CHIP DIODE SWITCHING KDS226 SOT-23 KEC	1.00	D101
168	[PART]	342-1114-A00	CHIP DIODE SWITCHING KDS114 KEC	1.00	D303
169	[PART]	342-5822-000	DIP SCHOTTKY DIODE 1N5822 ONSEMI	1.00	D900
170	[PART]	343-1060-000	DIODE 1N60	1.00	D161
171	[PART]	343-4004-000	DIODE 1N4004TR 400V 1A	2.00	D232
172	[PART]	343-5402-000	DIODE 1N5402	1.00	D901
173	[PART]	360-0450-100	CRYSTAL 4.50MHZ HC49S 12PF DTRON	1.00	X301
174	[PART]	360-1024-100	CRYSTAL 10.24MHZ 32PF 30PPM HC-49S DTRON	1.00	X101
175	[PART]	367-1060-200	CRYSTAL FILTER 10.695MHZ 49T-3L 10L08A DTRON	1.00	XF101
176	[PART]	373-4551-500	CERAMIC FILTER LT455HTW DTRON	1.00	CF101
177	[PART]	400-0019-000	TRANSFORMER CHOCK T1 EI-19 FINE	1.00	T901
178	[PART]	400-0024-000	TRANSFORMER EI-24(MOD) T2 FINE	1.00	T201
179	[PART]	406-2508-000	COIL SPRING 2.5X0.8X7T : R 0.11UH FINE	1.00	L704
180	[PART]	406-4005-000	COIL SPRING 4X0.5X6T : R FINE	1.00	L712
181	[PART]	406-4005-100	COIL SPRING 4X0.5X7T : R FINE	1.00	L713
182	[PART]	406-4005-200	COIL SPRING 4X0.5X10T : R FINE	1.00	L714
183	[PART]	406-5006-000	COIL SPRING 5X0.6X13.5T : R 0.5UH FINE	1.00	L707
184	[PART]	406-6008-000	COIL SPRING 6X0.8X5T : R 0.225UH FINE	1.00	L711
185	[PART]	410-0270-000	IFT COIL RF FREE TX 27MHZ TX1 FINE	2.00	L701 L702
186	[PART]	410-0272-000	IFT COIL 27MHZ RX (7RC) RX2 FINE	1.00	L107

187	[PART]	410-0273-000	IFT COIL 27MHZ RX1(Wire Diameter : $\phi$ 0.1) FINE	1.00	L101
188	[PART]	410-0370-000	IFT COIL 37MHZ TX TX2 FINE	1.00	L703
189	[PART]	410-1070-000	IFT COIL 10.7MHZ RX-B RX3 FINE	1.00	L108
190	[PART]	410-1500-000	IFT COIL 15MHZ TXRX VCO2 FINE	1.00	L302
191	[PART]	410-1650-000	IFT COIL 16.5MHZ VCO VCO1 FINE	1.00	L301
192	[PART]	410-4550-000	IFT COIL DETECTOR 455KHZ RX4 FINE	1.00	L109
193	[PART]	410-4551-000	IFT COIL 455KHZ-B RX5 FINE	1.00	L112
194	[PART]	425-0150-000	COIL AXIAL 1.5UH AL0305 MATSUTA	1.00	L102
195	[PART]	425-0180-000	COIL AXIAL 1.8UH AL0305 MATSUTA	1.00	L106
196	[PART]	425-0680-000	COIL AXIAL 6.8UH AL0305 MATSUTA	1.00	L706
197	[PART]	427-0017-000	CORE SPRING 5.5TX0.45XM5ERX2.3 0.17UH FINE	3.00	L103 L104 L105
198	[PART]	427-0600-000	COIL CHOCK 6UH BOBBIN CORE	1.00	L201
199	[PART]	500-8800-301	PCB MAIN VER.2.1A 2LAYER LUCKY	1.00	
200	[PART]	534-2500-100	JACK MINI PJ-206 GABOU	1.00	J203
201	[PART]	535-3500-100	JACK DC PJ-625 GABOU	2.00	J201 J202
202	[PART]	540-0218-000	WAFER 2PIN PH-2A 180C FINE	1.00	J205
203	[PART]	540-0618-000	WAFER 6PIN PH-6A 180C	1.00	J503
204	[PART]	540-1618-000	WAFER 16PIN PH-16A 180C FINE	1.00	J102
205	[PART]	547-0825-000	WIRE STRIP D0.8 L25MM	1.00	JP1
206	[PART]	560-1010-000	SW ROTARY PS1210-KQ20A10-A20-102 CTR	1.00	SW812
207	[PART]	702-C7700-80A	VCO SHIELD CAN SPTE 0.3T DESHAN	1.00	For Vco
208	[PART]	702-C8800-50A	TX SHIELD CAN(1) SPTE 0.3T (TCB880)	1.00	LOCATION LOWER
209	[PART]	702-C8800-60A	TX SHIELD CAN(2) SPTE 0.3T (TCB880)	1.00	LOCATION UPPER
210	[PART]	702-C8800-70A	SHIELD COVER SPTE 0.3T (TCB880)	1.00	For TX shield can 2
211	[PART]	719-R000D-006	CU TAPE-2 CU 77X15X0.1T	1.00	For TX shield can 1
212	[PART]	719-R000D-009	CU TAPE-1 CU 63.6X9X0.1T	1.00	For TX shield can 1
213	[ASS'Y]	5A3-7702-004	TCB881 DSS PCB ASS'Y	1.00	
214	[PART]	142-101J-000	CHIP RES. 0603 100OHM +-5 PHILIPS	1.00	R500
215	[PART]	142-222J-000	CHIP RES. 0603 2.2KOHM +-5 PHILIPS	1.00	R511
216	[PART]	142-223J-000	CHIP RES. 0603 22KOHM +-5 PHILIPS	1.00	R502
217	[PART]	142-473J-000	CHIP RES. 0603 47KOHM +-5 PHILIPS	5.00	R509 R512 R513 R515 R516
218	[PART]	142-564J-000	CHIP RES. 0603 560KOHM +-5 PHILIPS	2.00	R504 R508
219	[PART]	166-474J-000	TRIM. POTENTIOMETER 470KB TMC3KJ0B0470KTR NOBLE	1.00	RV501
220	[PART]	212-103B-3K0	CHIP CERAMIC CAP. 0603 0.01UF X7R 16V +-10	1.00	C505
221	[PART]	212-104B-3K0	CHIP CERAMIC CAP.0603 0.1UF X7R 16V +-10 PHILIPS	4.00	C501 C509 C512 C513
222	[PART]	212-105A-2K0	CHIP CERAMIC CAP. 0603 1UF X5R 10V +-10	1.00	C511
223	[PART]	212-222B-3K0	CHIP CERAMIC CAP. 0603 0.0022UF X7R 16V +-10 PHILI	1.00	C504
224	[PART]	212-330C-6J0	CHIP CERAMIC CAP. 0603 33PF NP0 50V +-5 PHILIPS	2.00	C507 C508

225	[PART]	212-331B-6K0	CHIP CERAMIC CAP. 0603 330PF X7R 50V +-10 PHILIPS	1.00	C506
226	[PART]	212-333B-3K0	CHIP CERAMIC CAP.0603 0.033UF X7R 16V +-10 PHILIPS	1.00	C502
227	[PART]	212-472B-3K0	CHIP CERAMIC CAP.0603 0.0047UF X7R 16V +-10 PHILIP	1.00	C503
228	[PART]	221-1064-M00	CHIP TANTAL CAP. 10UF 16V A SIZE +-20	1.00	C500
229	[PART]	221-4744-M00	CHIP TANTAL CAP. 0.47UF 16V A SIZE +-20	1.00	C510
230	[PART]	300-3875-000	CHIP TR. SWITCHING KTC3875S SOT-23 KEC	1.00	Q501
231	[PART]	331-0358-A00	IC OP AMP KIA358F KEC	1.00	IC501
232	[PART]	342-0226-A00	CHIP DIODE SWITCHING KDS226 SOT-23 KEC	1.00	D501
233	[PART]	500-7702-000	DSS-001, 002 PCB	1.00	
234	[PART]	545-0260-200	WIRE UL1007 / AWG26 BLACK 40mm 3 : 3	1.00	
235	[PART]	545-0261-200	WIRE UL1007 / AWG26 RED 40mm 3 : 3	1.00	
236	[PART]	545-0263-000	WIRE UL1007 / AWG26 YELLOW 40mm 3 : 3	1.00	
237	[PART]	545-0269-000	WIRE UL1007 / AWG26 WHITE 40mm 3 : 3	1.00	
238	[PART]	547-0616-000	JUMP WIRE L : 16MM $\Phi$ 0.6MM	1.00	SJ2
239	[PART]	547-0618-000	JUMP WIRE L : 18MM $\Phi$ 0.6MM	1.00	SJ1
240	[PART]	718-R000D-050	CUSHION EVA SPONGE 16X22X3.0T 3M DOUBLE SIDE TAPE	1.00	
241	[ASS'Y]	700-C81BE-A00	ESCUTCHEON ASS'Y - TCB881B	1.00	
242	[PART]	701-C7700-50A	CH KNOB ABS(BLACK COLOR)	2.00	For Vol & Ch
243	[PART]	701-C81B0-10A	ESCUTCHEON ABS (BLACK SPRAY)	1.00	FRONT CASE PLASTIC
244	[PART]	701-C8800-20A	WINDOW ACRYL	1.00	
245	[PART]	701-C8800-40A	ILLUMINATOR(VOL) ACRYL CLEAR	1.00	FOR VOL
246	[PART]	701-C8800-50A	ILLUMINATOR(CH) ACRYL CLEAR	1.00	FOR CH
247	[PART]	701-C8800-60A	ILLUMINATOR(SQ) ACRYL CLEAR	4.00	For Sq, Rf, Mic gian, Q up/down
248	[PART]	701-C8800-70A	ILLUMINATOR(PA) ACRYL CLEAR	1.00	For Pa/off/dx
249	[PART]	701-C88B0-20A	SQ KNOB ABS BLACK SPRAY	4.00	For Sq, Rf, Mic gian, Q up/down
250	[PART]	703-C8800-10A	KEY PAD 6 SILICONE, Hs=60, PU COATING	1.00	
251	[PART]	703-C8800-20A	KEY PAD 2 SILICONE, Hs=60, PU COATING	1.00	
252	[PART]	706-2605S-NFH	SCREW MACH(+) M2.6X5L Ni PLATED FH	4.00	Escutcheon + Main body mounting
253	[PART]	708-2608T-NBH	SCREW MACH(+) M2.6X8L-TAPTITE NI PLATING BH	2.00	Front Pcb mounting
254	[PART]	712-M70NI-001	RING NUT BsBm Ni PLATING	6.00	FOR VOL
255	[PART]	715-C170N-005	FELT(S / W) D4.5XD17X0.3T BLACK	3.00	
256	[PART]	719-R000P-007	VOL ILLUMINATOR STICKER WOOD FREE PAPER 58X7X0.2T	1.00	For Vol
257	[PART]	719-R000P-008	SQ ILLUMINATOR STICKER WOOD FREE PAPER 46X7X0.2T	5.00	For Sq illuminator & Ch illuminator
258	[PART]	719-S000D-034	WINDOW TAPE 3M DOUBLE SIDE TAPE	1.00	
259	[ASS'Y]	700-C880M-B00	TCB880 MAIN BODY ASS'Y	1.00	
260	[PART]	541-0239-002	CONNECTOR FD-ANT-1 NINGBO	1.00	J701
261	[PART]	543-0200-000	POWER CORD 2PIN PLUG ASS'Y AWG#20 PAN-ASIA	1.00	J900
262	[PART]	701-C5500-70A	CORD STOPPER PP BLACK	1.00	

263	[PART]	701-C5500-80A	BUSH NYLON66 + GRASS 15%	1.00	For TR
264	[PART]	702-C7701-30A	ANT. TERMINAL SPTE 0.2T	1.00	For Antenna
265	[PART]	702-C8800-40A	MAIN BODY EGI 1.0T (TCB880)	1.00	
266	[PART]	706-3008T-BBH	SCREW MACH(+) 3X8L-TAPTITE BLACK BH	4.00	Main PCB + Main body mounting
267	[PART]	706-3010S-BBH	SCREW MACH(+) M3X10L BLACK BH	3.00	TR mounting
268	[PART]	711-M30NI-000	NUT M3 Ni PLATED	3.00	TR mounting
269	[PART]	713-M30NI-S01	SPRING WASHER M3	3.00	TR mounting
270	[PART]	723-C7700-001	MICA 0.6T	1.00	For TR
271	[ASS'Y]	700-C88SC-A00	COVER ASS'Y - TCB881	1.00	
272	[PART]	520-7700-000	SPEAKER 77AR000-8P-4D29 ASAHI	1.00	SPK201
273	[PART]	540-0220-000	WIRE HARNESS PH-2PIN TO OPEN UL 1007 NO26 L200mm	1.00	J204
274	[PART]	702-C7700-30A	BRACKET SPK EGI 1.0T COATING DESHAN	3.00	For speaker
275	[PART]	702-C8800-10B	UPPER COVER SPC 0.8T, BLACK SPRAY, UV COATING, TTI CB	1.00	
276	[PART]	702-C8800-20A	BOTTOM COVER SPC + BLACK COATING 0.8T	1.00	
277	[PART]	706-3008T-BBH	SCREW MACH(+) 3X8L-TAPTITE BLACK BH	9.00	Upper cover + Main body mounting:6pcs/Bracket(SPK):3pcs
278	[PART]	715-C760N-004	FELT (SPK) D76X0.2T BLACK	1.00	For speaker
279	[PART]	715-R000D-003	FELT (COVER) 8X146X0.3T BLACK	4.00	For upper cover adhesive(location: side)/For bottom cover adhesive(location: side)
280	[PART]	718-R000D-001	CUSHION 20X24X4.0T EVA SPONGE BLACK	1.00	For upper cover adhesive(location: center)
281	[ASS'Y]	8A0-C81B-000	PACKING ASS'Y - TCB881B	1.00	
282	[PART]	543-0201-000	POWER CORD 2PIN RECEPTACLE ASSY AWG20 2A PANASIA	1.00	
283	[PART]	701-C7701-80A	STUD BOLT ABS M6X8L BLACK	2.00	
284	[PART]	702-C7701-10A	BRACKET MIC SUS304 1.0T	1.00	
285	[PART]	702-C8800-80A	BRACKET SET	1.00	
286	[PART]	703-C7700-50A	PACKING RUBBER	2.00	
287	[PART]	706-3008T-BBH	SCREW MACH(+) 3X8L-TAPTITE BLACK BH	2.00	
288	[PART]	708-50121-ZTH	SCREW TAP(+) 5X12L-1S ZN PLATING TH	3.00	
289	[PART]	714-M30NI-001	STAR WASHER-S M3 NI PLATING B TYPE	2.00	
290	[PART]	714-M50NI-002	STAR WASHER-L M5 NI PLATING B TYPE	3.00	
291	[PART]	801-C881-001	GIFTBOX SW1E 2.0T(Rev.01)	1.00	
292	[PART]	804-C881-A00	INNER BOX A SW1E 2.0T, WHITE	1.00	
293	[PART]	804-C881-B00	INNER BOX B SW1E 2.0T, WHITE	1.00	
294	[PART]	809-C881-001	OUTBOX DW1E 7.0T(Rev.01)	0.10	
295	[PART]	817-0520-000	POLYBAG PE 50X200	1.00	
296	[PART]	817-0810-000	POLYBAG PE 80X100	2.00	
297	[PART]	817-2230-000	POLYBAG PE 220X300	1.00	
298	[PART]	820-C881-001	Manual 7Language_136P(CRT Manual insert) Rev.01	1.00	
299	[PART]	830-C881-000	NAME LABEL	1.00	
300	[PART]	833-C881-000	CODE 39 SERIAL NO. STICKER	2.00	

301	[PART]	834-0001-000	WARNING LABEL	1.00	
302	[PART]	834-ROTE-R00	ROSTEST MARK STICKER	1.00	
303	[PART]	836-C880-000	LCD PROTECTIVE SHEET	1.00	
304	[PART]	837-0001-000	OPP TAPE 50MM TTI LOGO	0.29	
305	[PART]	838-0001-000	YELLOW STRAP	0.26	0.26m/ctn
306	[PART]	905-C880-000	CB MICROPHONE ASS'Y(AMC-5021)	1.00	